


Fiber Optics Product Encoding System

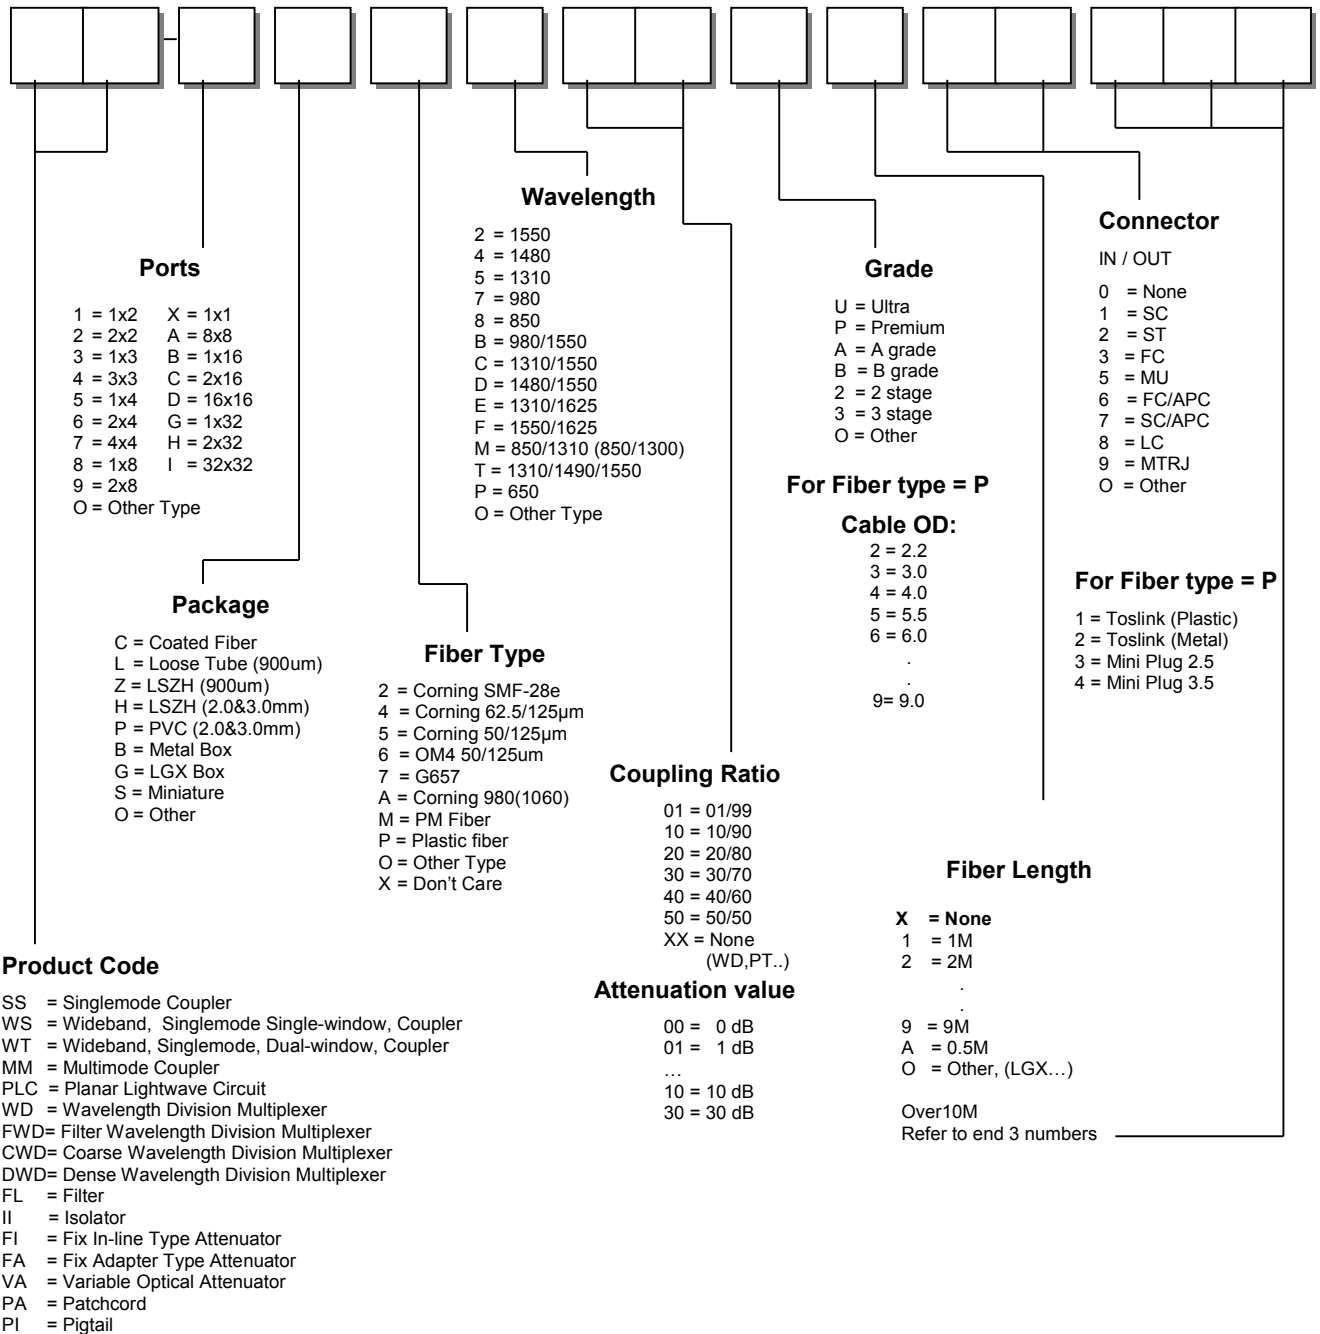

Remark

For Attenuator : Coupling Ratio = Attenuation value from 00 to 30 dB  
 For Fix Adapter Type Attenuator : Fiber Length = Plug Type M : Male ; F: Female  
 For Filter : Coupling Ratio = 10 means first wavelength pass; second stop;  
 = 01 means first wavelength stop; second pass;  
 For example, Wavelength=C, Coupling Ratio=10 means Filter let wavelength 1310 pass, 1550 stop.